



**C06HWC**

**Pre-wired Interconnecting  
Cable**

**Installation/Operation  
Manual C940M-C (9/95)**

**1.0 SCOPE**

The information within this manual covers the installation and operation of the C06HWC pre-wired interconnecting cable.

Prior to installation and use of this product, the following WARNINGS should be observed.

1. Installation and Servicing should only be done by Qualified Service Personnel.
2. The installation shall be done in accordance with all local and national electrical and mechanical codes utilizing only approved materials.
3. Unless the cable is specifically marked "WA" (for use in wet locations), the cable is designed for indoor use only and it must not be installed where exposed to rain and moisture.

Please thoroughly familiarize yourself with the information in this manual prior to installation and operation.

**2.0 DESCRIPTION**

The C06HWC is a pre-wired 6 foot cable designed for use with Pelco hard-wire controls for pan/tilts, scanners and motorized lenses. The pre-wired cable is supplied with a 14-pin control connector on one end and butt splices on the mating end for the pan/tilt or lens, allowing for a quick and easy field installation. Compatible controls are listed below:

*MLZ6DT	*MLZA6DT	MPT24DT
MPT24DT/220	MPTA24DT	MPTA24DT/220
MPT115DT	MPTA115DT	MPT220DT
MPTA220DT	PT506-24DT	PT506-24A
PT506-24DT/220	PT506-24A/220	

\* Compatible only when not used with the AI700 (Auto-iris).

### 3.0 SPECIFICATIONS

#### **ELECTRICAL**

Connectors:	
Control side:	14 pins
Pan and tilt/ Lens side:	Butt splices
Cable:	12 conductor

#### **GENERAL**

Dimensions:	6 ft (1.83 m) long
Maximum Wire Temperature:	140° F (60° C)

### 4.0 INSTALLATION

1. Splice the cable to the pan/tilt and or lens using the butt splices provided.
2. Connect the 14-pin CPC connector to the controller.
3. Operate the control unit and determine correct operation of the pan/tilt or lens. If the unit fails to operate correctly, refer to the troubleshooting guidelines outlined in Section 6.0.

### 5.0 OPERATION

By using the controller, you should be able to control the pan and tilt functions of the pan/tilt and/or the focus, iris, and zoom functions of the motor operated lens.

#### **5.1 SYSTEM TEST**

Using the controller, operate the following functions (if applicable) and verify correct operation of each function:

1. Pan Left
2. Pan Right
3. Tilt Up
4. Tilt Down
5. Zoom Wide
6. Zoom Tele
7. Iris Open
8. Iris Closed
9. Focus Near
10. Focus Far
11. Preset Operation (optional on pan/tilt and dome)
12. Camera Power
13. Enclosure Power
14. Camera Sync

If all the above functions operate correctly, the installation process is complete. If all the above functions do not operate correctly, refer to Section 6.0, Troubleshooting Guidelines.


## 6.0 TROUBLESHOOTING GUIDELINES

1. If none of the functions in Section 5.1 operate correctly, check the connection of the CPC connector to the control unit.
2. If the connection is loose, tighten the lock ring on the CPC connector and start the system test procedure in Section 5.1.
3. If the connections are tight, check the butt splices to determine if the splices were made correctly. If the butt splices are correctly made, there may be a problem with the control unit, pan/tilt, or lens. Pelco's Technical Assistance Program (TAP) should be contacted for further technical troubleshooting aid. To contact the TAP line, call **1-800-289-9100**.

**NOTE:** If you find the environmental dome or pan/tilt has the pan and tilt functions operating backwards (e.g., "Tilt Up" actually tilts down and "Pan Right" actually pans left), pins 3 and 7 for pan and pins 5 and 6 for tilt have been reversed. The problem can be corrected in the field with a CPC pin/socket extracting tool by simply exchanging the reversed function. If you do not have the necessary tool, contact Pelco for a R/A number to exchange the cable.

## 7.0 SCHEMATICS

Figure 1 is a wiring diagram of the pre-wired cable. It may be used to troubleshoot wiring problems.

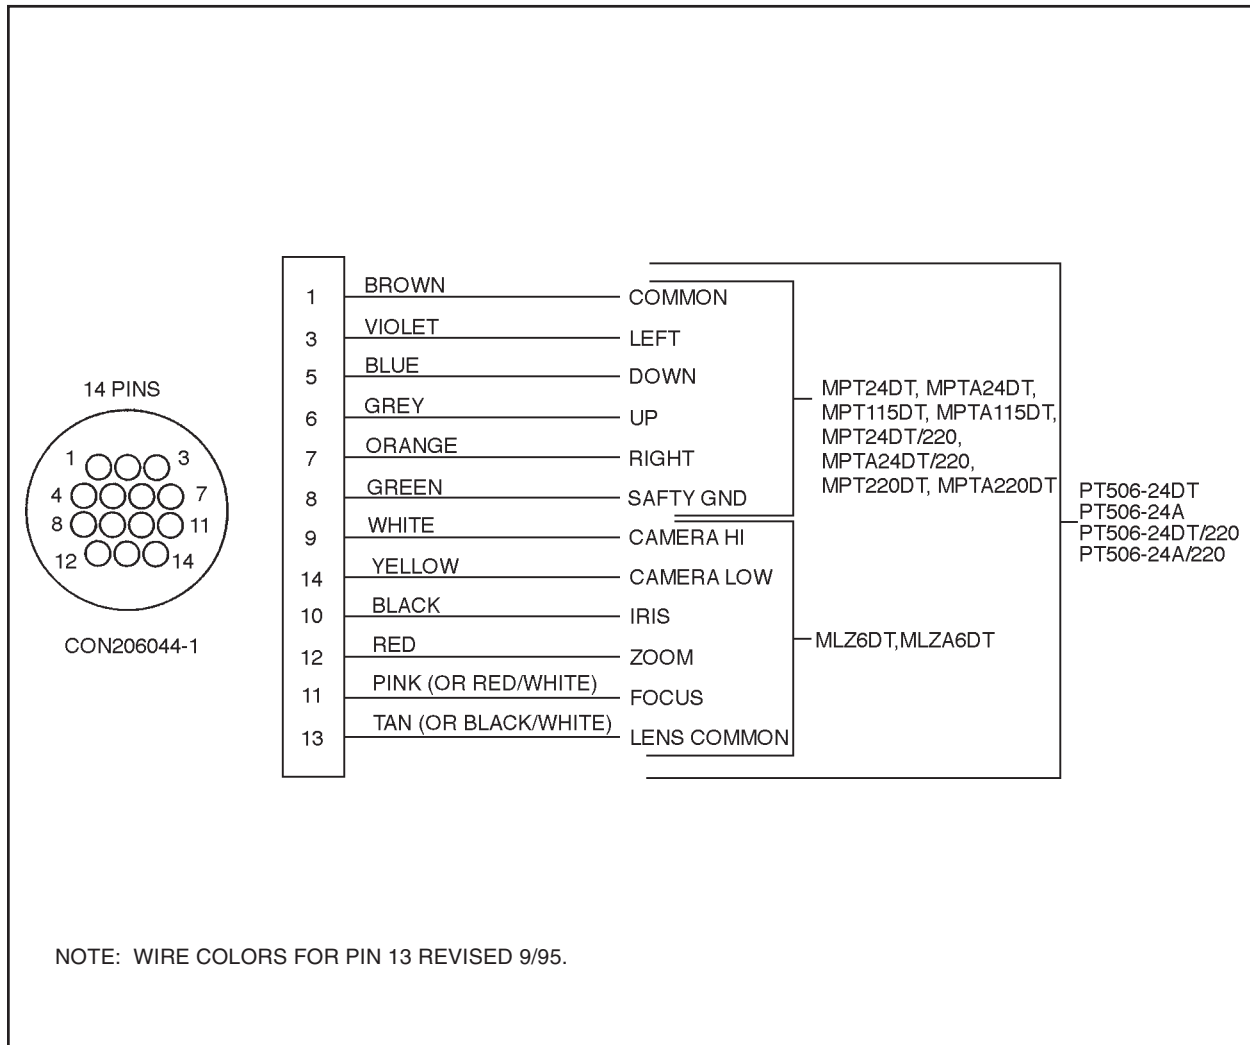

**Figure 1.** C06HWC Wiring Diagram

## 8.0 WARRANTY AND RETURN INFORMATION

### WARRANTY

Pelco will repair or replace, without charge, any merchandise proved defective in material or workmanship for a period of one year after the date of shipment.

Exceptions to this warranty are as noted below:

- Five years on FT/FR8000 Series fiber optic products.
- Three years on Genex® Series products (multiplexers, server, and keyboard).
- Three years on Camclosure® and fixed camera models, except the CC3701H-2, CC3701H-2X, CC3751H-2, CC3651H-2X, MC3651H-2, and MC3651H-2X camera models, which have a five-year warranty.
- Two years on standard motorized or fixed focal length lenses.
- Two years on Legacy®, CM6700/CM6800/CM9700 Series matrix, and DF5/DF8 Series fixed dome products.
- Two years on Spectra®, Esprit®, ExSite™, and PS20 scanners, including when used in continuous motion applications.
- Two years on Esprit® and WW5700 Series window wiper (excluding wiper blades).
- Eighteen months on DX Series digital video recorders, NVR300 Series network video recorders, and Endura™ Series distributed network-based video products.
- One year (except video heads) on video cassette recorders (VCRs). Video heads will be covered for a period of six months.
- Six months on all pan and tilts, scanners or preset lenses used in continuous motion applications (that is, preset scan, tour and auto scan modes).

Pelco will warrant all replacement parts and repairs for 90 days from the date of Pelco shipment. All goods requiring warranty repair shall be sent freight prepaid to Pelco, Clovis, California. Repairs made necessary by reason of misuse, alteration, normal wear, or accident are not covered under this warranty.

Pelco assumes no risk and shall be subject to no liability for damages or loss resulting from the specific use or application made of the Products. Pelco's liability for any claim, whether based on breach of contract, negligence, infringement of any rights of any party or product liability, relating to the Products shall not exceed the price paid by the Dealer to Pelco for such Products. In no event will Pelco be liable for any special, incidental or consequential damages (including loss of use, loss of profit and claims of third parties) however caused, whether by the negligence of Pelco or otherwise.

The above warranty provides the Dealer with specific legal rights. The Dealer may also have additional rights, which are subject to variation from state to state.

If a warranty repair is required, the Dealer must contact Pelco at (800) 289-9100 or (559) 292-1981 to obtain a Repair Authorization number (RA), and provide the following information:

1. Model and serial number
2. Date of shipment, P.O. number, Sales Order number, or Pelco invoice number
3. Details of the defect or problem

If there is a dispute regarding the warranty of a product which does not fall under the warranty conditions stated above, please include a written explanation with the product when returned.

Method of return shipment shall be the same or equal to the method by which the item was received by Pelco.

Pelco, the Pelco logo, Camclosure, Esprit, Genex, Legacy, and Spectra are registered trademarks of Pelco.  
Endura and ExSite are trademarks of Pelco.

© Copyright 1995, Pelco. All rights reserved.

### RETURNS

In order to expedite parts returned to the factory for repair or credit, please call the factory at (800) 289-9100 or (559) 292-1981 to obtain an authorization number (CA number if returned for credit, and RA number if returned for repair).

All merchandise returned for credit may be subject to a 20% restocking and refurbishing charge.

Goods returned for repair or credit should be clearly identified with the assigned CA or RA number and freight should be prepaid. Ship to the appropriate address below.

If you are located within the continental U.S., Alaska, Hawaii or Puerto Rico, send goods to:

Service Department  
Pelco  
3500 Pelco Way  
Clovis, CA 93612-5699

If you are located outside the continental U.S., Alaska, Hawaii or Puerto Rico and are instructed to return goods to the USA, you may do one of the following:

If the goods are to be sent by a COURIER SERVICE, send the goods to:

Pelco  
3500 Pelco Way  
Clovis, CA 93612-5699 USA

If the goods are to be sent by a FREIGHT FORWARDER, send the goods to:

Pelco c/o Expeditors  
473 Eccles Avenue  
South San Francisco, CA 94080 USA  
Phone: 650-737-1700  
Fax: 650-737-0933



### Pelco

3500 Pelco Way, Clovis, CA 93612-5699 (559)  
292-1981 • (800) 289-9100  
FAX (800) 289-9150 or (559) 292-3827

International customers call 1-559-292-1981 or  
FAX 1-559-348-1120

(Product specifications subject to change  
without notice.)

### C940M-C